



Rec'd PCT/PTO 07 JUL 2004 #2

GB03/32



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 21 FEB 2003


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

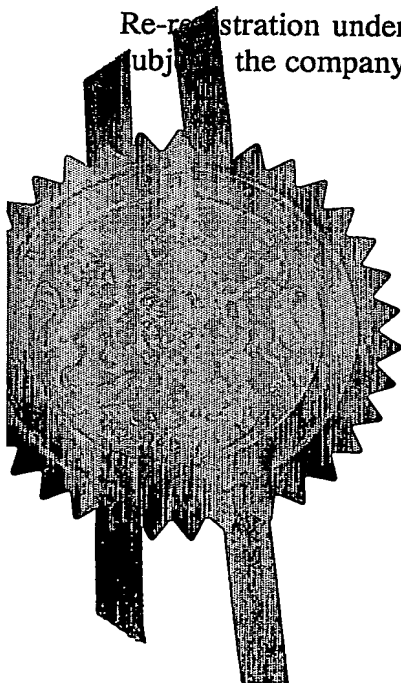


Signed

*Evenis*

Dated

28 January 2003

**BEST AVAILABLE COPY**

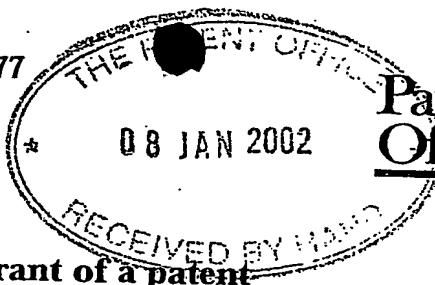

The  
Patent  
Office

177  
07JAN02 0806323-5 000005  
P01/7701/0-00-0200343/2

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference P33418GB/NJMH

2. Patent application number  
(The Patent Office will fill in this part)

0200343.2

08 JAN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Royal College of Art  
Kensington Gore  
London SW7 2EU  
(further applicants on continuation sheet)

Patents ADP number (if you know it)

5540273001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom



4. Title of the invention

ILLUMINATING SURFACE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode  
20 Red Lion Street  
London  
WC1R 4PJ

Patents ADP number (if you know it)

125001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

YES

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	7
Claim(s)	3
Abstract	0
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	0

Any other documents  
(please specify)

Continuation sheet for Section 3.

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 08/01/02

12. Name and daytime telephone number of person to contact in the United Kingdom

N J M Hedley  
Tel: 020 7539 4200

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

CONTINUATION SHEET

3. Full name, address and postcode of the or each applicant

OSSEVOORT, Stijn Hermannus Wilhelmus  
10 Thorparch Road  
Flat A  
London SW8 4RU 8300451001

WOOLF, Natalie  
24 Beauchamp Place 8300469001  
London SW3 1NH

DUPLICATE

1

## ILLUMINATING SURFACE

### Technical Field

5 The present invention relates to an illuminating surface that emits light in the presence of an object touching or in close proximity to the surface.

10 It is known to use light emitting tiles to form a floor or ceiling panels. It is also known that the illumination given by such panels can be touch-sensitive. This is achieved, according to a known arrangement, by providing a gel layer between a light source and the front surface of the panel; when the gel layer is pressed, it becomes thinner in that region and accordingly allows more light to pass to the front surface. In time, the gel returns to a uniform thickness, thereby causing the light to emit uniform illumination once again.

15 It is also known to mark out a path to be followed using individual light sources; such an arrangement is known, for example, in aircraft to mark the path to emergency exits.

20 When used as floor tiles, it would be advantageous to emit light not only from the area being touched but also from adjacent areas so that, if the rest of the room is dark, light can escape from the adjacent areas to provide illumination for a person crossing the floor, e.g. a child looking for the toilet in the middle of the night. It is also desirable, for the same reason, that light is still emitted even after a person's foot has been lifted from the floor so that the path of the person remains illuminated. Such an arrangement can also be useful for security purposes to show that a person has crossed a floor and where that person has gone.

### Disclosure of Invention

25 According to the present invention, there is provided an illuminating surface that, when connected to a power source, emits light in the presence of an object touching or in close proximity to the surface, which surface comprises: an array of sensors for detecting the presence of the object (which will in many applications be a person's foot or hand); an array of light sources, each sensor being associated with at least one light source such that, when one of said sensors detects the presence of the object, its associated light source is illuminated; and a circuit for controlling the illumination of each light source such that it

30

remains illuminated for a time after its associated sensor has ceased to detect the presence of the object; wherein each of the light sources is connected with at least one adjacent sensor and is illuminated when the adjacent sensor detects the presence of an object thereby causing an area of the surface to emit light that corresponds to and is larger than the shape of the object.

The sensors can be proximity sensors, e.g. based on capacitance in the space above the surface, or contact sensors, e.g. simple switches that are closed by predetermined pressure applied to the surface. Both types of sensors are well known and accordingly further description is unnecessary.

The illuminating surface is preferably an array of circuits, each circuit comprising at least one sensor and at least one light source. In order to simplify the operation of the surface, each circuit has its own power supply and controls its own light source(s); such an arrangement dispenses with the use of a central processor to control the illumination of the surface; the use of such a central processor adds greatly to the complexity of the installation of an illuminating surface since it requires data lines to be provided to each light source to control its operation.

As mentioned above, the area of the surface that emits light is larger than the shape of the object touching or in close proximity to the surface. This may be achieved by connecting adjacent circuits together in such a way that, when the sensor of one circuit (the "detecting circuit") detects the presence of the object, the light source of at least one adjacent circuit is caused to be illuminated. Preferably, the light source of the adjacent circuit is illuminated after a delay following the illumination of the light source of the detecting surface, thereby giving the effect that the surface that emits light in the presence of the object is spreading.

When the object is removed from contact or proximity with the surface, the light sources of the relevant circuits cease to be illuminated; it is preferred that the light sources of the adjacent circuits cease to be illuminated prior to the light sources of the detecting circuit, thereby giving the effect that the area of the surface that emits light shrinks when the object is no longer touching or adjacent to the surface.

Preferably, each detecting circuit is energisable from a power source when its sensor detects the presence of an object touching or in close proximity to the surface, thereby activating the light source of that circuit; in a preferred embodiment, current from the  
5 detecting circuit can leak to adjacent circuits, thereby activating the light source of the adjacent circuit.

It is preferred that each circuit includes a transistor having a base terminal, an emitter terminal and a collector terminal, the arrangement being such that the light source is  
10 illuminated when the transistor becomes conductive; when the sensor detects the presence of an object, the potential of the base is preferably changed, thereby allowing current to flow through the transistor and so also activating the light source to emit light.

Each circuit is preferably connected to the base of the transistor of an adjacent circuit,  
15 whereby potential from a detecting circuit can be applied to the base of the adjacent circuit, thereby rendering the transistor of the adjacent circuit conductive and hence the light source of the adjacent circuit to be activated. Preferably, the connection between each circuit and the base of the transistor of the adjacent circuit is via a resistor, so that the  
20 potential applied to the transistor base of an adjacent circuit is less than the potential applied to the transistor base of the detecting circuit. With such an arrangement, when the potential leaks from the transistor base following removal of the object, the light source of the adjacent surface is switched off prior to the light source of the detecting circuit.

The "object" that will cause the illumination of the surface may not only be an inanimate  
25 object but also a person; when used as a floor, the surface can be rendered illuminating by walking across it.

The advantage of the present invention is that the area of the illuminating surface that  
30 emits light is larger than the area of the object; since the object will block light from the surface in contact with the object, such an arrangement increases the level of illumination provided by the surface. This is advantageous when the illuminating surface is used to light a walker's passage across a room and for decorative effect.

The light sources will continue to emit light even after the object has been removed; this again increases the level of illumination provided by the illuminating surface and its decorative effect. In addition, it can be used for security purposes to show, for example, the passage of someone who has crossed a room.

5

It is possible to link all the light sources to a microprocessor so that they can be illuminated prior to a person walking across the surface to mark a path across the surface. However, that requires conductive paths between the microprocessor and the light sources that increases the complexity of the system but it is a possible additional feature of the present invention if the effect is thought worthwhile in view of the additional complexity.

10

#### **Brief Description of the Drawings**

There will now be described, by way of example only, an illuminating surface according to the present invention by reference to the accompanying drawings in which:

15

Figure 1 shows an array of circuits forming an illuminating surface according to the present invention;

Figure 2 shows the same circuits as Figure 1 but on an expanded scale; and

Figure 3 is a schematic partial sectional view of a panel having a surface according to the present invention.

20

#### **Description of Best Mode of Operation**

Referring initially to Figure 2, there is shown an array of circuits 10, which are all identical. In view of this, only the components of the circuit (circuit G) in the top left hand corner of Figure 2 will be shown.

25

30

The circuit comprises a switch 12 connected between a source of potential 14 (e.g. about 12 volts so that the floor does not carry high potential, which could be hazardous) and the base terminal 16 of a Darlington transistor 18. The circuit also includes a light emitting diode (LED) 20 connected between the transistor 18 and the potential source 14; a resistor 22 is included between the potential source 14 and the light emitting diode 20. A capacitor 24 is connected in parallel with the switch 12 and a resistor 26 is connected in series between the switch 12 and the base terminal 16. Lines 28 connect adjacent circuits 10 via resistors 30. A connection 32 is introduced between lines 28 of each circuit and the



resistor 26 so that potential can be applied from line 28 via resistor 26 to the base terminal 16 of transistor 18.

5 The emitter terminal of transistor 18 is connected to a negative potential source or, more generally, to earth.

Transistor 18 is only conductive above a threshold potential applied at base 16. When the switch 12 is open (as shown) the potential applied to the base 16 of the transistor 18 is below the threshold and accordingly current cannot flow through the transistor and so LED 10 20 remains unilluminated. In this condition, the capacitor 24 will be charged. When the switch 12 is closed, a potential is applied from terminal 14 to the base 16 via resistor 26 that renders the transistor 18 conductive and so current passes through the LED, which emits light. At the same time, capacitor 24 is discharged.

15 In addition to applying potential to the transistor 18 of its own circuit, G, the potential from terminal 14 is applied to the four adjacent circuits C, F, H and K via switch 12 of circuit G and connections 32, lines 28 and resistors 30 (only circuit K is shown full in Figure 2 and for that reason, the following description will make particular reference to circuit K but, as is clear from Figure 1, the same will also apply to each adjacent circuit). The potential is 20 applied via the connection 32 and the resistor 26 of each such adjacent circuit to the base terminal of the transistor 18 of that circuit. The potential applied to base 16 is sufficient to cause the transistor 18 to become conductive and hence for the LED of adjacent circuit K to emit light.

25 Because of the presence of resistors 30, the potential applied to base 16 of circuit K will be less than that applied to the base 16 of circuit G (assuming the switch 12 of circuit K remains open). In addition, it will take a greater amount of time for the base terminal 16 of circuit K to reach the threshold potential due to the need to partially discharge capacitor 24 of circuit K with the current supply from circuit G. Thus, LED 20 of circuit K starts 30 emitting light slightly after the LED of circuit G.

If the switch 12 of circuit K were closed, then the potential at base 16 would be the same in circuit K as in circuit G. However, assuming that the switch 12 of circuit K is not closed,

the lighting up of LED 20 of circuit K after LED 20 of circuit G gives the appearance of the illuminated area spreading over time. When the switch 12 of circuit G is opened, the potential applied at bases 16 of circuits G and K fall and, when they reach their threshold values, transistors 18 of the these two circuits cease to be conductive. Because the  
 5 potential at base 16 of circuit K is lower than that of base G, transistor 18 of circuit K becomes non-conductive before that of circuit G (assuming the switch 12 of circuit K is never closed). This gives an impression that the illuminated area shrinks and fades from the edge inwards.

10 The potential at base 16 reduces as a result of the charging of the capacitor 24 and leakage of potential through other circuits in the network. The duration of the reduction in potential at base 16 to its threshold value will depend on the value of resistors 26 and 30 and the capacitance of the capacitor 24.

15 Referring now to Figure 1, if the switch 12 of circuit G were closed, the potential from source 14 will be applied via a single resistor 30 to circuits C, F, H and K, thereby causing the LED of those circuits to emit light. The terminal 14 will be connected via two resistors 30 to circuits B, D, E, J, L and O. Depending on the value of the resistors 30 and 26, that may be sufficient to cause the transistors 18 of those circuits to become conductive and so  
 20 their LED's to emit light.

In a preferred embodiment, the values of the various components are as follows:

	resistor 22:	330 ohms
	resistor 26:	4700 ohms
25	resistor 30:	10 to 30 megaohms
	capacitor 24:	220 nF
	threshold value of base 16:	1.5 volts

30 A partial sectional view of a panel having a surface according to the present invention is shown schematically in Figure 3. The panel includes a rigid backing sheet 40 supporting the circuits 10 of Figures 1 and 2 shown schematically by the reference number 42 in Figure 3. The switches 12 of the circuits of Figures 1 and 2 are also shown and they can be closed by the application of a light pressure to them. The top layer of the panel is formed

by a flexible sheet 42 of transparent or translucent plastic 44. When a person treads on the panel, the top layer 44 depresses the switches immediately under the person's foot, thereby closing switches 12 and illuminating the LEDs of the associated circuits 10. After an interval, the area of panel 38 that is illuminated by LEDs spreads to adjacent circuits 10 in the manner described above. When the person's foot is lifted, the LED of each circuit will remain illuminated until the threshold voltage at the base terminal 16 of that circuit falls below the threshold value. This will happen for circuits 10 whose switch 12 are not closed before it occurs in the circuits whose switches 12 are closed, which will give the effect of the area of the panel illuminated shrinking over time. The area of the panel 38 that is illuminated by LEDs will correspond generally to the shape of the person's foot (or other object pressing against the sheet 44), although it will of course be larger because of the activation of the adjacent circuits, as described above. The resolution of the surface will depend on the number of LEDs per unit area, which will typically be 1,000 per square metre or above.

The circuit will generally be provided in the form of panels or tiles having connectors at their edges to connect to adjacent panels to form the lines 28 connecting the circuits 10 together across the whole extent of a surface that is larger than each individual panel or tile.

CLAIMS

1. An illuminating surface that, when connected to a power source, emits light in the presence of an object touching or in close proximity to the surface, which surface  
5 comprises:
  - an array of sensors for detecting the presence of the object;
  - an array of light sources, each sensor being associated with at least one light source such that, when one of said sensors detects the presence of the object, its associated light source is illuminated; and
  - 10 a circuit for controlling the illumination of each light source such that it remains illuminated for a time after its associated sensor has ceased to detect the presence of the object;wherein each of the sensors is connected with at least one adjacent light source that is illuminated when the sensor detects the presence of an object, thereby causing an area of  
15 the surface to emit light that corresponds to and is larger than the shape of the object.
2. An illuminating surface as claimed in claim 1, which includes an array of circuits, each circuit comprising at least one sensor and at least one light source.
- 20 3. An illuminating surface as claimed in claim 2, wherein each circuit has its own power supply and is not under the control of a central processor for the surface.
4. An illuminating surface as claimed in claim 2 or claim 3, wherein adjacent circuits are connected in such a way that, when the sensor of one circuit (the "detecting circuit")  
25 detects the presence of the object touching or adjacent to the surface one circuit, at least one adjacent circuit causes its light source to be illuminated.
5. An illuminating surface as claimed in claim 4, wherein the light source of the said at least one adjacent circuit is illuminated after a delay following the illumination of the  
30 light source of the said detecting circuit, thereby giving the effect that the area of the surface that emits light in the presence of the object spreads.

6. An illuminating surface as claimed in claim 4 or 5, wherein the light source of the said at least one adjacent circuit ceases to be illuminated prior to the light source of the said detecting circuit, thereby giving the effect that the area of the surface that emits light shrinks when the object is no longer touching or adjacent to the surface.

5

7. An illuminating surface as claimed in any one of claims 4 to 6, wherein each detecting circuit is energisable from a power source when its sensor detects the presence of an object touching or in close proximity to the surface, thereby illuminating the light source of that circuit.

10

8. An illuminating surface as claimed in claim 7, wherein current from the said detecting circuit leaks to at least one adjacent circuit, thereby energising the light source of the adjacent circuit.

15

9. An illuminating surface as claimed in any one of claims 4 to 8, wherein each circuit comprises a transistor having a base terminal, an emitter terminal and a collector terminal, the arrangement is such that the light source is illuminated when the transistor is conductive and wherein, when the sensor detects the object, the potential at the base terminal is changed, thereby causing the transistor to become conductive.

20

10. An illuminating surface as claimed in claim 9, wherein each circuit is connected to the base of the transistor of the at least one adjacent circuit, whereby potential from a detecting circuit is applied to the transistor base terminal of the adjacent circuit, thereby changing the potential of the adjacent circuit transistor base terminal, allowing current to flow through the transistor of the adjacent circuit and causing the light source of the adjacent circuit to be illuminated.

25

11. An illuminating surface as claimed in claim 10, wherein the detecting circuit is connected to the base of the transistor of the at least one adjacent circuit via a resistor such that the potential applied to the base of the transistor of the at least one adjacent circuit is less than the potential applied to the base of the transistor of the detecting circuit.

30

12. An illuminating surface as claimed in any one of claims 1 to 11, wherein the sensors are switches that are closed by the object touching the surface.

5 13. An illuminating surface as claimed in any one of claims 1 to 12 in the form of a floor or wall tile.

14. An illuminating surface as claimed in any one of claims 1 to 13 connected to a power source.

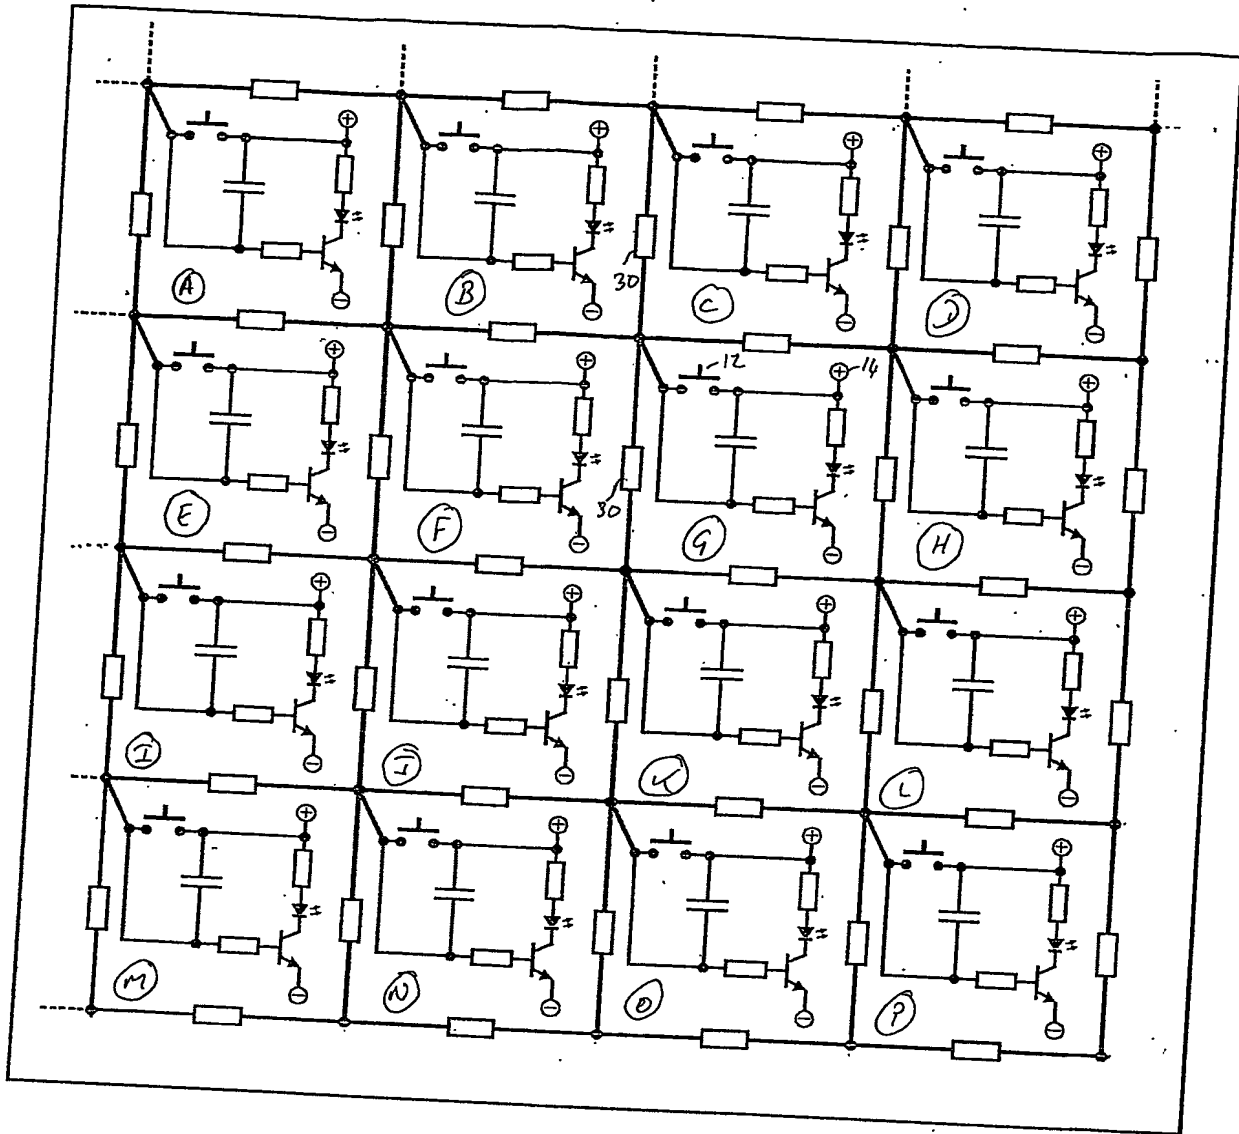


Fig 1


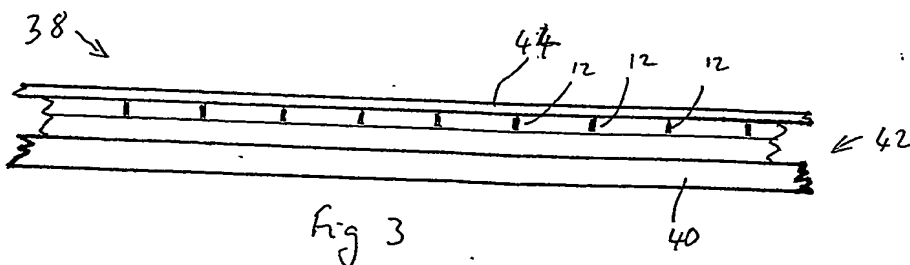


Fig 3

Fig 2



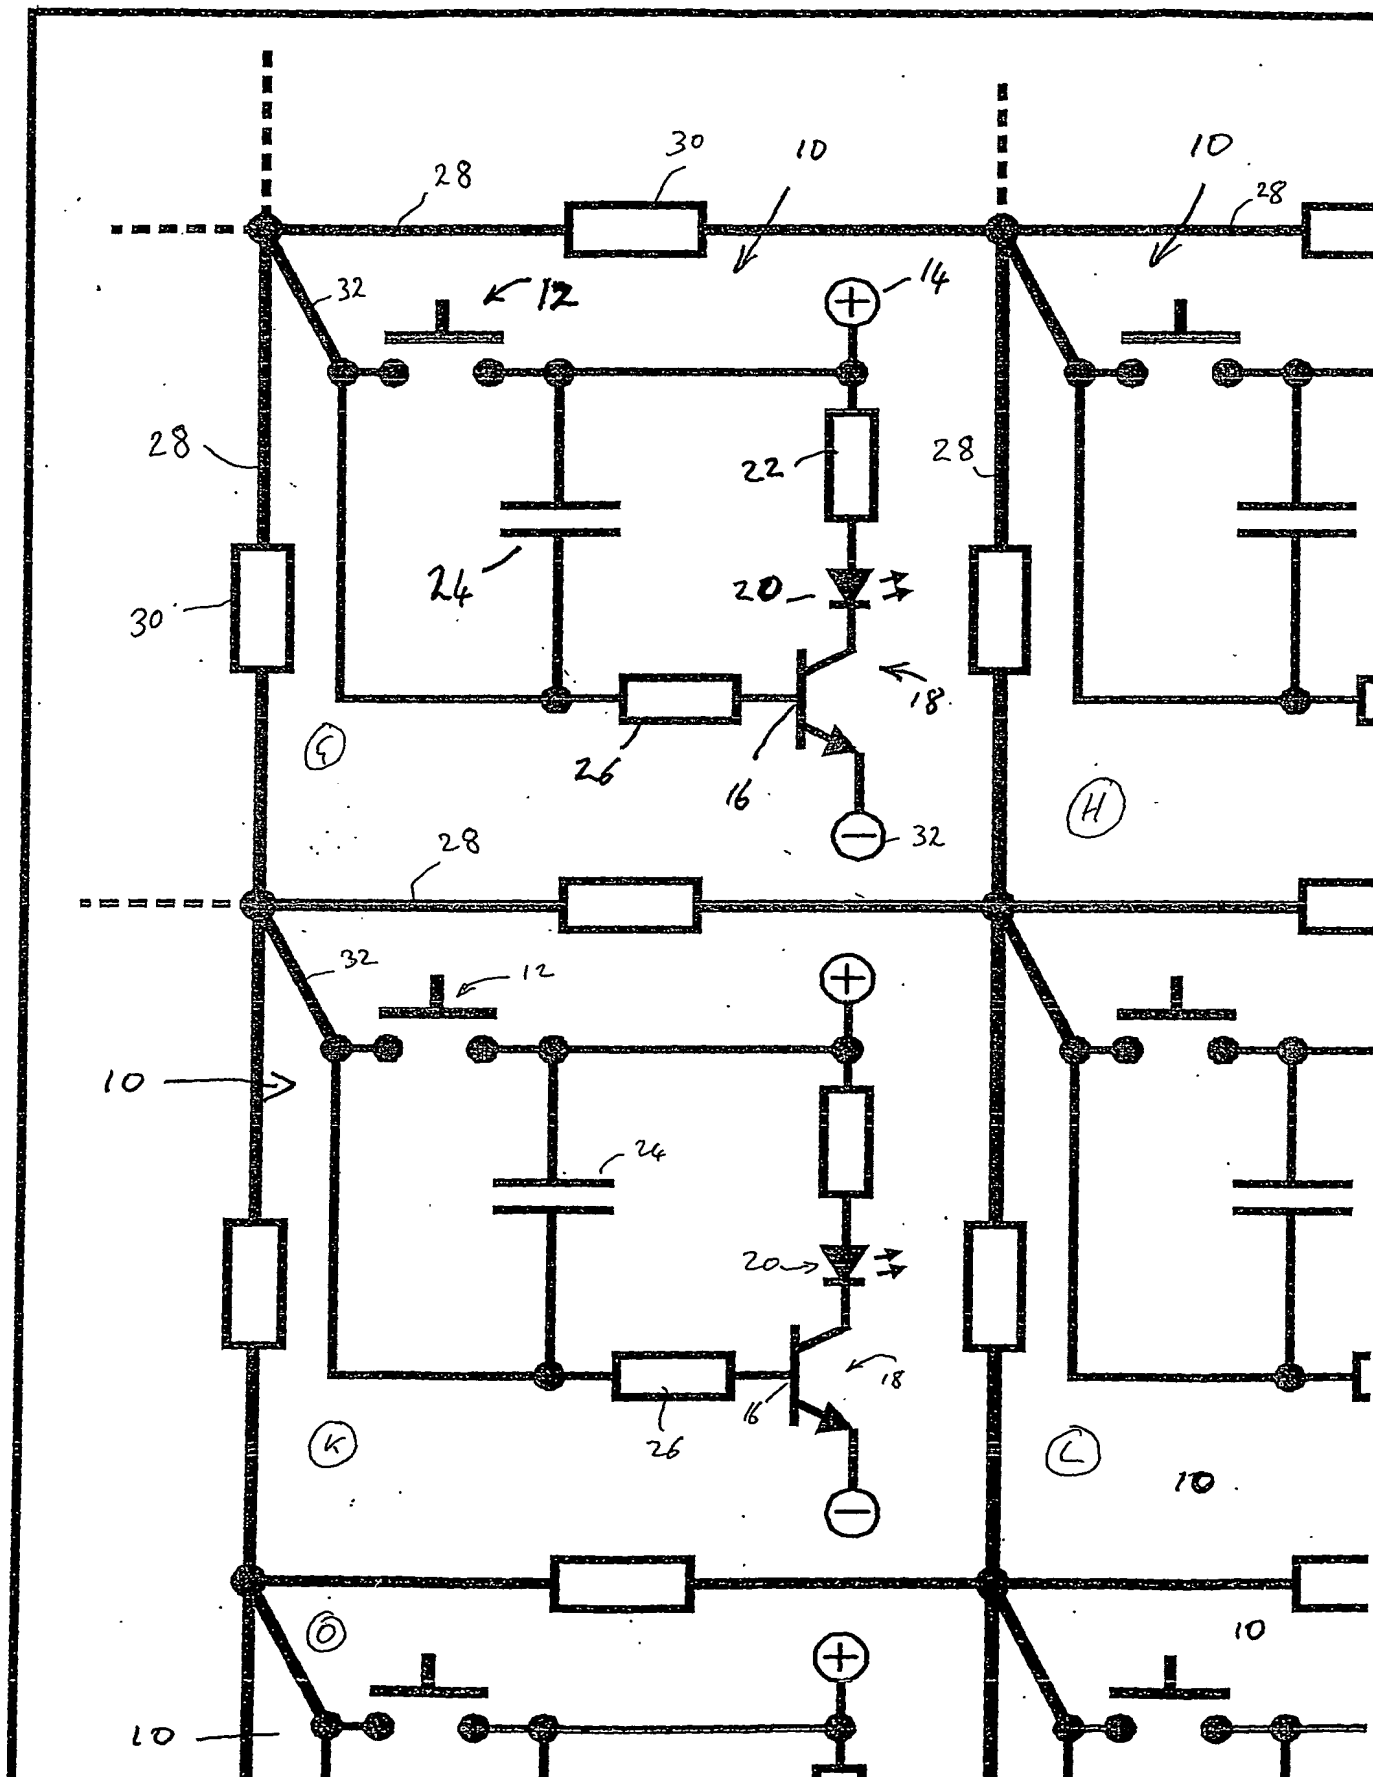

INVENT OFFICE  
29 JAN 2003  
CIRCUITRY  
1997

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**